



5800 SE 78th Street, Ocala FL 34472
 Phone: 800-327-3015 Fax 352-245 0726
www.americanpanel.com


Project: WS1200M6C / WS1200M6D	QUOTATION:	
Location:	Submitted by:	
Customer:	DATE:	08/28/2015
Identity #:	For Record	By:
Tag:	For Approval	Date:

PHYSICAL & ELECTRICAL DATA

	COMPRESSOR		CONNECTIONS (inches)		RECEIVER CAPACITY (80%)	NET WEIGHT	WATER (FPT)	85°F INLET 15° SST	AMBIENT TEMP
	Model No.	HP	Liquid	Suction				23.2 GPM	
	3DF3R15ME	12	7/8	1-5/8	147	701	1-1/4"	0.9 PSI	95°F

POWER SUPPLY	COMPRESSOR		FAN MOTOR			MCA†		MOP‡		Evap. Fan	Defrost Heater	
	Volts / Ph / Hz	RLA	LRA	QTY	HP	FLA	Air	Elec.	Air	Elec.	Amps	Amps
208-230/3/60	43.2	275				54		90				
460/3/60	21.2	138				26.5		45				

†MCA=Minimum Circuit Ampacity
 ‡MOP = Maximum Overcurrent Protection

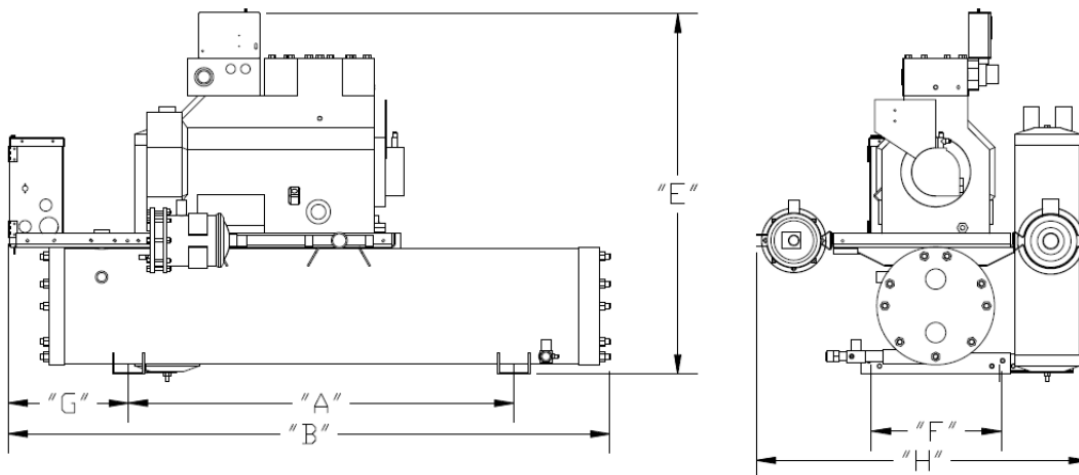



5800 SE 78th Street, Ocala FL 34472
 Phone: 800-327-3015 Fax 352-245 0726
www.americanpanel.com

DIMENSIONS (inches)								
A	B	C	D	E	F	G	H	J
36	56.03			33.76	12	11.06	31	

CAPACITY (BTUH)						
40 °F SST	35°F SST	30 °F SST	25 °F SST	20 °F SST	15 °F SST	10°F SST
144290	135970	127640	119790	111940	103030	94270

SST = Saturated Suction Temperature

STANDARD FEATURES

- | | |
|--|---|
| <p>Construction</p> <ul style="list-style-type: none"> • Pre-bent tubing • Easy access refrigerant piping • Pressure relief valve • Shell and Tube Cleanable condenser coil • More spacious, pre-painted electrical box • 230 volt control (circuit transformer on 460 volt models) • Single electrical connection location • Shipped with dry nitrogen charge • Heavy duty base plate • Plastic conduit on all wiring runs • Replaceable core filter drier with sight glass • Removable electrical box from compressor access from the front • Captive door fasteners | <p>Compressor</p> <ul style="list-style-type: none"> • Discus compressor • Compressor contactor • Oil pressure switch (where required) • • • Pump down switch • Fixed low pressure switch (adjustable on low temp models) • Fixed high pressure switch |
|--|---|

OPTIONS

Mounted Options:

<input checked="" type="checkbox"/> Power Switch: Compressor Circuit Breakers	<input checked="" type="checkbox"/> Suction Filter Drier: Replaceable Core Filter
<input checked="" type="checkbox"/> Misc: Suction Accumulator	<input checked="" type="checkbox"/> Misc: Dual Pressure Control
<input checked="" type="checkbox"/> Water Regulating Valve	

Ship Loose Options: